




## PAS68 CYCLE RAIL - CR820CR

A zero penetration short height cycle hoop tested with the M1 3,500kg vehicle at 48kph. This product was extensively tested at 2 angles. Designed to complement existing street furniture. Shallow depth foundation of just 250mm. Available in a variety of heights (minimum 750mm above ground). Available with gap between 800mm and 1200mm. Suitable for securing bikes, scooters and motorcycles.



### Features

- Height above ground of 750mm
- Shallow foundation of just 250mm
- Supplied as a pair with all integral connections
- No re-bar required

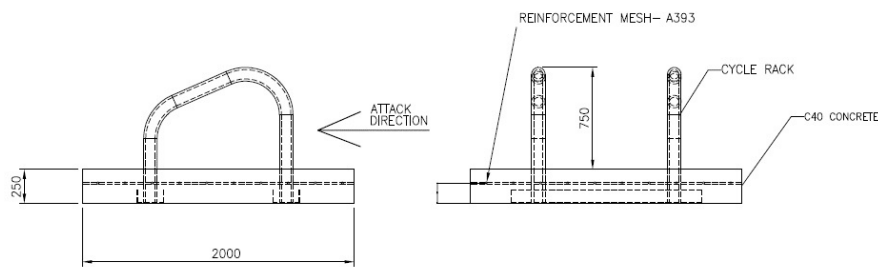

### Technical Specifications

- PAS68: V3500[N1]48/15:0.0/0.0
- PAS68: V3500[N1]48/90:1.5/0.0
- Bollard tested with N1 3,500kg vehicle at 48kmh
- Height: 750mm above FFL
- Foundation: 2000mm x 2000mm x 250mm
- Optional Finishes: hot dip galvanised (HDG); powder coated; wet painted; stainless steel



Security Providers Licence:  
3251000

Electrical Contractor's Licence:  
86460



QBCC Licence:  
1133023



Master Builders Member:  
64928



ASIS Member:  
312860



ASIAL Member:  
37871



INSTALLER MEMBER

