

TRUCKSTOPPER 10-30 (IWA 14) V/7200/N2A/48/90/8.2

IWA 14 Surface Mount Single Removable Bollard



safetyflex
ANTI-TERRORIST BOLLARDS
BARRIERS & CRASH FENCES

Applications

- ▶ Airports
- ▶ Sports Arenas
- ▶ Retail Parks
- ▶ Police Stations
- ▶ Critical Infrastructure
- ▶ Government Buildings
- ▶ Conference Centres

*'New technology
breakthrough -
SURFACE MOUNTED'*

'THE CITY SLICKER' TRUCKSTOPPER 10-30 (surface mount single removable bollard)

This world's first crash tested, surface mounted single bollard, has been crash tested as a single removable bollard, tested to the new international workshop agreement - IWA 14. This surface mount bollard, can be fitted straight onto an existing concrete surface without having to dig up the existing surface and will still give you the full protection of a 7.2 ton vehicle travelling at 30 mph/48kph at 90 degrees without the cost and inconvenience of digging up the roadway or footpath. Once fitted you may need access with a vehicle so the bollards can be removed and replaced very quickly.

This system is the **most economical to buy and install on the market today**. It can be a stand alone single unit or can be in a row of bollards. **No heavy plant is needed to install** as the bollards are delivered as break down kits and can be built up on site. Once fitted **no maintenance is needed** and if covered with a shroud are very aesthetically pleasing.

CPNI
Centre for the Protection
of National Infrastructure



TRUCKSTOPPER 10-30 IWA 14 VEHICLE PERFORMANCE CLASSIFICATION						
Vehicle Test Weight	Vehicle Class	Vehicle Speed	Vehicle Angle	Vehicle Penetration	25KG+ Dispersion	Surface Mount
V/7200 KG	N2A	48	90	8.2	0.00	0.00

TRUCKSTOPPER 10-30 (IWA 14) V/7200/N2A/48/90/8.2

IWA 14 Surface Mount Single Removable Bollard




'THE CITY SLICKER'



Safetyflex also offer a selection of shrouds and street furniture. Details available on request.

Spring Bollard Cover Side View

Spring Bollard Cover Front View

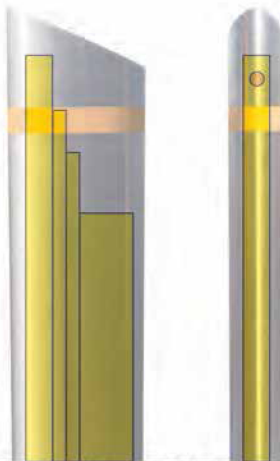

- ▶ Surface mounted
- ▶ No complicated installation
- ▶ Static & Removable
- ▶ Tested to IWA 14
- ▶ Ideal for concrete suspended slabs
- ▶ Crash tested with 7200 kg truck at 30 mph

Product Specification:

Height Above Ground: 900mm

Footing Depth: Surface Mount

Options: Stainless Steel & Mild Steel Shrouds

Surface Mount